



vivendjus
SOLAR TECH


Ihr Ansprechpartner für Solaranlagen:

Herr Mazar, Tel. +49 162 96 20 522

Sunket TOPCon Linear Warranty

SKT410~430M10-108D3 410~430 Watt

182mm 16BB 108Cells All Black Double Glass Bifacial
TOPCon Mono Half Cell PV-Module Series

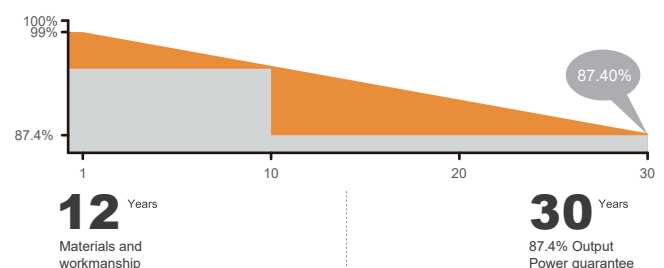

SBBB Technology
Half Cut TOPCon Cell



High Energy
Performance



100% Inspection
30years Guarantee



Fire Class A



5400Pa
Strengthened
Mechanical Load



Advanced Bifacial
Efficiency




SUNKET®



Vivendius-Haus GmbH
Langeoogstraße 20 · 45665 Recklinghausen
Overwegstraße 28 · 45879 Gelsenkirchen

Commerzbank
IBAN: DE71 4204 0040 0410 9252 00
BIC: COBADEFFXXX

Handelsregister: HRB 4941 Recklinghausen
Geschäftsführer: Volker Raabe
USt.ID-Nr. DE813679021

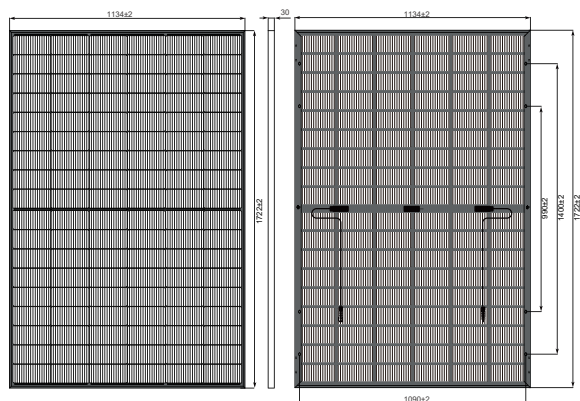

Current-Voltage & Power-Voltage Curves (SKT430M10-108D3)

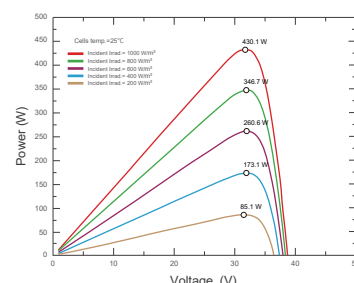

All Dimensions in mm

The above drawing is a graphical representation of the product.

For engineering quality drawings please contact SUNKET.

Electrical Characteristics (STC/NOCT)

Module Type	SKT410M10-108D3		SKT415M10-108D3		SKT420M10-108D3		SKT425M10-108D3		SKT430M10-108D3	
Front Side	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	410	313.5	415	317.3	420	321.1	425	325.0	430	328.7
Open Circuit Voltage - Voc(V)	38.20	36.30	38.33	36.40	38.46	36.50	38.59	36.60	38.72	36.80
Short- Circuit Current - Isc(A)	13.93	11.23	14.01	11.30	14.09	11.36	14.17	11.42	14.25	11.49
Voltage at Pmax -Vmp(V)	31.60	29.60	31.79	29.70	31.97	29.90	32.16	30.00	32.34	30.20
Current at Pmax - Imp(A)	12.98	10.60	13.06	10.68	13.14	10.75	13.22	10.82	13.30	10.89
Module Efficiency -ηm(%)	21.00	/	21.30	/	21.50	/	21.80	/	22.00	/
Power Tolerance(W)	(0, +4.99W)									
Maximum System Voltage(V)	1500Vdc (IEC / UL)									
Maximum Series Fuse Rating (A)	25A									

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	1722x1134x30mm
Weight	21kg
Solar Cells	N-Type 16BB 182mm (2x54pcs)
Front Glass	AR Coated 1.6+1.6 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm², 1200mm (+),1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Specifications are subject to change without further notification

Bifacial Output Rear Side Power Gain

Power Gain	5%	15%	25%
Maximum Power- Pmax(W)	441.0	483.0	525.0
Open Circuit Voltage - Voc(V)	38.50	38.50	38.60
Short- Circuit Current - Isc(A)	14.79	16.20	17.61
Voltage at Pmax -Vmp(V)	32.00	32.00	32.10
Current at Pmax - Imp(A)	13.80	15.11	16.43

Packing Configuration

	1722x1134x30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	6	26
Pieces per Container	216	936